

BAND-IT MEGASTRAPPER WIRELESS

Up to 1" (25mm) Wide Repulpable BALEBAND

- Up to 500Lbs. (~2.2kN) tensile strength per strap
- Increase bale throughput by as much as 100%
- Allows for Bar Coding
- Reduce cycle time as much as 50%
- Reduce maintenance frequency
- Also accepts 5/8" (16mm) and 3/4" (19mm)

Top Sealing Head

- Optional mounting integrated in BAND-IT frame or separate.
- Eye level for easy in-line access
- Auto adjusts to bale height
- No routine lubrication required
- Virtually contamination proof
- Joint on top of bale eliminates contact with conveyors or floors

Cold Seal Joint


- **Safer:** No fire hazard, electrical shock, or burn injuries
- **Stronger:** Seal surface area increased by 260% and joint failure due to fiber burn is eliminated
- **Faster:** No cool down or heat up time

Single Servo Driven

- Optimal performance
- Pure and Simple

SANDAR iLink Ethernet Option


- Online troubleshooting
- Instantaneous software upgrades
- Online monitoring

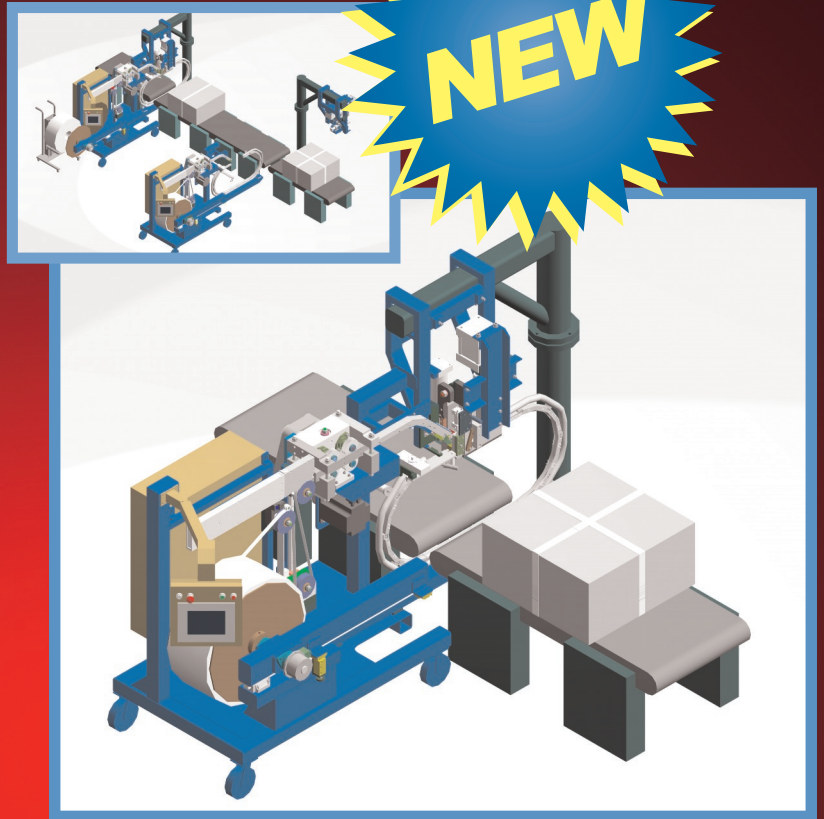


Accommodates up to 32" Diameter Spools

- Less frequent loading
- Reduce storage, shipping, and handling


- Fits all existing lines. No modification required
 - Modular design
- Allen-Bradley or Siemens PLC platform




THROUGHPUT




DOWNTIME



CYCLE TIME



BALE STRENGTH



SANDAR
INDUSTRIES, INC.

1545 Main Street • Atlantic Beach, FL 32233 • U.S.A.

(904) 246-4309 (904) 246-2299 • www.sandar.com • email: jrodriguez@sandar.com